香港電阻

香 港 電 阻 製 造 廠

香港柴湾安业街十二号长益工业大厦**10**字楼**A**座

HONG KONG RESISTORS MANUFACTORY

(wholly owned by Hong Kong Resistors Manufactory International Ltd.)

AN ISO 9001:2015 CERTIFIED MANUFACTURER

AN ISO 45001: 2018 MANUFACTURER

AN ISO 14001: 2015 MANUFACTURER

10A Cheong Yick Industrial Building, 12 On Yip St., Chai Wan, Hong Kong

Tel.: (852)28962782 Fax.: (852) 28965291

国内工厂一 ：东莞溢辉电子有限公司

地址 : 广东省东莞市大岭山镇大岭山大道396号4栋801室

Tel.: (86 769)83315373 Fax.: (86 769) 83311603

国内工厂二:恒辉电阻(益阳)有限公司

地址 ：湖南省益阳市资阳区长春工业园五福路

Tel.: (86 737)3800399 Fax.: (86 737) 3800199

国内工厂三：南充溢辉电子科技有限公司



地址：四川省南充市高坪区青莲街道金辉路8号

Tel.: (86 817) 3315 388 Fax.:(86 817)3315 388

DATASHEET

Name of Product: Multilayer Chip Ceramic Capacity - MLCC Series

Sales Executive:_____ Date: 2024/3/5

制造 Prepared by	品质 Quality by	业务 Sales by	核准 Authorized by
			
客户 customer approval	客户 customer approval	客户 customer approval	客户 customer approval

Spec. No. MLCC 2024

Rev. No.: 2024 Mar

1. 电容器及介质分类 Types of Capacitor and Dielectric Material

※COG：此类介质材料的电容器为Ⅰ类电容器, 包括常规、中高压 COG 产品。此类产品电性能稳定，几乎不随温度、电压和时间的变化而变化。适用于低损耗，稳定性要求高的电路中，如滤波器、谐振器和计时电路中。

※COG： The capacitor of this kind dielectric material is considered as Class Ⅰ capacitor, including general capacitor and high frequency COG capacitor。The electrical properties of COG capacitor are the most stable one and have little change with temperature, voltage and time. They are suited for applications where low-losses and high-stability are required, such as filters, oscillators, and timing circuits.


※X7R、X5R、X6S、X7T、X7S：此类介质材料的电容器为Ⅱ类电容器，具有较高的介电常数，容量比Ⅰ类电容器高，具有较稳定的温度特性，适用于容量范围广，稳定性要求不高的电路中，如隔直、耦合、旁路、鉴频等电路中。

※ X7R、X5R、X6S、X7T、X7S： material is a kind of material has high dielectric constant. The capacitor made of this kind material is considered as Class Ⅱ capacitor whose capacitance is higher than that of class Ⅰ. These capacitors are classified as having a semi-stable temperature characteristic and used over a wide temperature range, such in these kinds of circuits, DC-blocking, decoupling, bypassing, frequency discriminating etc.

※M3L：此类介质材料的电容器为Ⅰ类电容器, 包括常规 M3L 产品和高容中高压 M3L 产品。此类产品电性能稳定，几乎不随电压和时间的变化而变化，-55-125℃条件下介电常数温度系数满足-1000±500PPM/℃。适用于低损耗，稳定性要求高的电路中。

※M3L： The capacitor of this kind dielectric material is considered as Class Ⅰ capacitor, including general capacitor and high votage M3L capacitor。The electrical properties of M3L capacitor are stable and have little change with voltage and time. Temperature coefficient within -1000±500ppm/℃. They are suited for applications where low-losses and high-stability are required.

2．产品结构 Product Frame

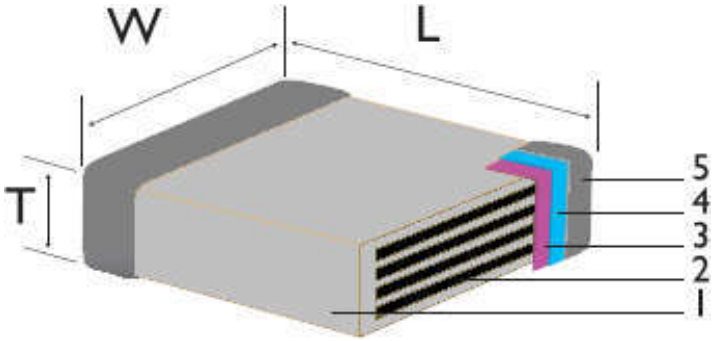


序号 No:	名称 Name
1	陶瓷介质 Cerrmic dielectric
2	内电极 Inner eletrode
3	外电极 Outer eletrode
4	镍层 Nickel
5	锡层 Tin

3．产品规格型号命名规则

General Product Parts Numbering System

(例) (example)

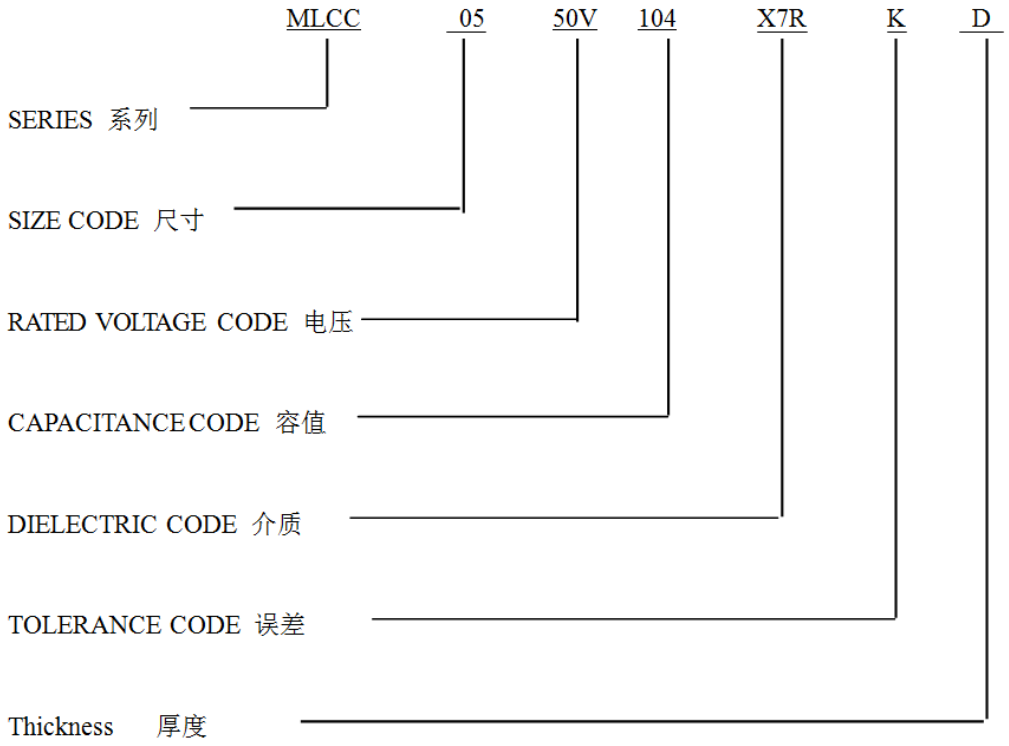

Remarks :

Capacitance Code ：

容值代码 105=10×10 ^{4} = 100,000pF，4表示 10^4

Two significant digits followed by no. of zero

Dielectric Code 介质: COG、 X7R 、X5R、X7T、X6S、X7S、M3L

Tolerance Code 误差: A=±0.05pF、 B=±0.1pF、 C=±0.25pF、 D=±0.5pF、 F=±1.0%、G=±2.0%、J=±5.0%、 K=±10% 、M=±20%、 Z=-20/+80%

Thickness 厚度 A:0.50mm 、B:0.60mm 、C:0.80mm、 D:0.85mm 、E:1.00mm、 F:1.25mm、 H:1.60mm 、G:2.00mm、 M:2.50mm 、Z:0.30mm

产品的介质特性组别

材质	工作温度范围	温度系数或温度特性
COG	-55℃~+125℃	0±30ppm/℃
X7R	-55℃~+125℃	±15%
X5R	-55℃~+85℃	±15%
X7T	-55℃~+125℃	+22/-33%
X7S	-55℃~+125℃	±22%
X6S	-55℃~+105℃	±22%
M3L	-55℃~+125℃	−1000±500ppm/℃

4. 产品容量范围 Product Capacitance Range

0201尺寸

0201																	
	COG系列		X7R系列		X5R系列				X6S系列				X7S系列		X7T系列		
Cp/V_{DC}	50	25	50	25	25	16	10	6.3	25	16	10	6.3	50	25	16	10	6.3
0R1	Z	Z															
0R2	Z	Z															
0R3	Z	Z															
0R4	Z	Z															
0R5	Z	Z															
0R6	Z	Z															
0R7	Z	Z															
0R8	Z	Z															
0R9	Z	Z															
1R0	Z	Z															
1R1	Z	Z															
1R2	Z	Z															
1R3	Z	Z															
1R5	Z	Z															
1R6	Z	Z															
1R8	Z	Z															
2R0	Z	Z															
2R2	Z	Z															
2R4	Z	Z															
2R7	Z	Z															
3R0	Z	Z															
3R3	Z	Z															
3R6	Z	Z															
3R9	Z	Z															
4R0	Z	Z															
4R3	Z	Z															
4R7	Z	Z															
5R0	Z	Z															
5R1	Z	Z															
5R6	Z	Z															
6R0	Z	Z															
6R2	Z	Z															
6R8	Z	Z															
7R0	Z	Z															
7R5	Z	Z															
8R0	Z	Z															
8R2	Z	Z															
9R0	Z	Z															
9R1	Z	Z															
100	Z	Z															
220	Z	Z															
330	Z	Z															
390	Z	Z															
470	Z	Z															
680	Z	Z															
101	Z	Z															
181			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
221			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
241			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
271			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
331			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
471			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
681			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
751			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
102			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
152			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
222			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
332			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
472			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
682			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
103				Z	Z	Z	Z	Z	Z	Z	Z	Z		Z	Z	Z	Z
153				Z	Z	Z	Z	Z	Z	Z	Z	Z		Z	Z	Z	Z
223					Z	Z	Z	Z	Z	Z	Z	Z			Z	Z	Z
473					Z	Z	Z	Z	Z	Z	Z	Z			Z	Z	Z
863					Z	Z	Z	Z	Z	Z	Z	Z			Z	Z	Z
104					Z	Z	Z	Z	Z	Z	Z	Z			Z	Z	Z
224								Z	Z	Z	Z	Z			Z	Z	Z
474								Z				Z					Z
105								Z									

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products。

0402尺寸

0402																											
	COG系列		X7R系列					X6S系列					X5R系列					X7S系列					X7T系列				
Cp/V_{DC}	50	25	50	25	16	10	6	50	25	16	10	6	50	25	16	10	6	50	25	16	10	6	25	16	10	6.3	4
0R1	A	A																									
0R2	A	A																									
0R3	A	A																									
0R4	A	A																									
0R5	A	A																									
0R6	A	A																									
0R7	A	A																									
0R8	A	A																									
0R9	A	A																									
1R0	A	A																									
1R1	A	A																									
1R2	A	A																									
1R3	A	A																									
1R5	A	A																									
1R6	A	A																									
1R8	A	A																									
2R0	A	A																									
2R2	A	A																									
2R4	A	A																									
2R7	A	A																									
3R0	A	A																									
3R3	A	A																									
3R6	A	A																									
3R9	A	A																									
4R0	A	A																									
4R3	A	A																									
4R7	A	A																									
5R0	A	A																									
5R1	A	A																									
5R6	A	A																									
6R0	A	A																									
6R2	A	A																									
6R8	A	A																									
7R0	A	A																									
7R5	A	A																									
8R0	A	A																									
8R2	A	A																									
9R0	A	A																									
9R1	A	A																									
100	A	A																									
120	A	A																									
150	A	A																									
180	A	A																									
200	A	A																									
220	A	A																									
270	A	A																									
300	A	A																									
330	A	A																									
390	A	A																									
470	A	A																									
560	A	A																									
680	A	A																									
820	A	A																									

0402																											
	COG系列		X7R系列					X6S系列					X5R系列					X7S系列					X7T系列				
Cp/V_{DC}	50	25	50	25	16	10	6	50	25	16	10	6	50	25	16	10	6	50	25	16	10	6	25	16	10	6.3	4
101	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
121	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
151	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
181	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
201	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
221	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
271	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
331	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
391	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
471	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
561	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
681	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
821	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
102	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
152			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
182			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
222			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
272			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
332			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
472			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
562			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
682			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
103			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
153			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
183			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
223			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
273			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
333			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
393			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
473			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
563			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
683			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A						A	A	A	A	A
104			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
154				A	A	A	A		A	A	A	A			A	A	A		A	A	A	A	A	A	A	A	A
184				A	A	A	A			A	A	A			A	A	A		A	A	A	A	A	A	A	A	A
224				A	A	A	A			A	A	A			A	A	A		A	A	A	A	A	A	A	A	A
274							A			A	A	A			A	A	A					A		A	A	A	A
334							A			A	A	A			A	A	A					A		A	A	A	A
474							A			A	A	A			A	A	A					A		A	A	A	A
684							A			A	A	A				A	A					A		A	A	A	A
105							A				A	A				A	A					A			A	A	A
225												A					A										

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.

0603尺寸

0603																																				
	COG系列						X7R系列								X6S系列					X5R系列					X7S系列					X7T系列					
Cp/V_{DC}	500	250	200	100	50	25	250	200	100	50	25	16	10	6	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	4
0R2	C	C	C	C	C	C																														
0R3	C	C	C	C	C	C																														
0R4	C	C	C	C	C	C																														
0R5	C	C	C	C	C	C																														
0R6	C	C	C	C	C	C																														
0R7	C	C	C	C	C	C																														
0R8	C	C	C	C	C	C																														
0R9	C	C	C	C	C	C																														
1R0	C	C	C	C	C	C																														
1R1	C	C	C	C	C	C																														
1R2	C	C	C	C	C	C																														
1R3	C	C	C	C	C	C																														
1R5	C	C	C	C	C	C																														
1R6	C	C	C	C	C	C																														
1R8	C	C	C	C	C	C																														
2R0	C	C	C	C	C	C																														
2R2	C	C	C	C	C	C																														
2R4	C	C	C	C	C	C																														
2R7	C	C	C	C	C	C																														
3R0	C	C	C	C	C	C																														
3R3	C	C	C	C	C	C																														
3R6	C	C	C	C	C	C																														
3R9	C	C	C	C	C	C																														
4R0	C	C	C	C	C	C																														
4R3	C	C	C	C	C	C																														
4R7	C	C	C	C	C	C																														
5R0	C	C	C	C	C	C																														
5R1	C	C	C	C	C	C																														
5R6	C	C	C	C	C	C																														
6R0	C	C	C	C	C	C																														
6R2	C	C	C	C	C	C																														
6R8	C	C	C	C	C	C																														
7R0	C	C	C	C	C	C																														
7R5	C	C	C	C	C	C																														
8R0	C	C	C	C	C	C																														
8R2	C	C	C	C	C	C																														
9R0	C	C	C	C	C	C																														
9R1	C	C	C	C	C	C																														
100	C	C	C	C	C	C																														
120	C	C	C	C	C	C																														
150	C	C	C	C	C	C																														
180	C	C	C	C	C	C																														
200	C	C	C	C	C	C																														
220	C	C	C	C	C	C																														
270	C	C	C	C	C	C																														
300	C	C	C	C	C	C																														
330	C	C	C	C	C	C																														
390	C	C	C	C	C	C																														
470	C	C	C	C	C	C																														
560	C	C	C	C	C	C																														
680	C	C	C	C	C	C																														
820	C	C	C	C	C	C																														
101	C	C	C	C	C	C	C	C	C																											
121	C	C	C	C	C	C	C	C	C																											
151	C	C	C	C	C	C	C	C	C																											
181		C	C	C	C	C	C	C	C																											
201		C	C	C	C	C	C	C	C																											

0603																																				
	COG系列						X7R系列								X6S系列					X5R系列					X7S系列					X7T系列						M3L系列
Cp/V_{DC}	500	250	200	100	50	25	250	200	100	50	25	16	10	6	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	4	50
221		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
271		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
331		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
391		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
471		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	C
561				C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	C
681				C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	C
821				C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	C
102				C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	C
122																																				C
152					C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	C
182					C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	C
222					C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	C
272					C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	C
332					C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
472					C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
562						C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
682						C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
103						C			C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
153									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
183									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
223									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
273									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
333									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
393									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
473									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
563									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
683									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
104									C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
154										C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
184										C	C	C	C	C	C	C	C	C	C	C	C	C	C	C						C	C	C	C	C	C	
224										C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
274										C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
334										C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
474										C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
684										C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
105										C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
225													C	C		C	C	C	C		C	C	C	C					C	C		C	C	C	C	
475														C		C	C	C	C		C	C	C	C					C	C		C	C	C	C	
106																	C	C	C			C	C	C					C	C			C	C	C	
226																								C											C	

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.

0805尺寸

0805																																		
	COG系列							X7R系列							X6S系列					X5R系列					X7S系列						X7T系列				
Cp/V_{DC}	630	500	250	100	50	25	16	250	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	100	50	25	16	10	6.3	25	16	10	6.3	4
0R2	B	B	B	B	B	B	B																												
0R3	B	B	B	B	B	B	B																												
0R4	B	B	B	B	B	B	B																												
0R5	B	B	B	B	B	B	B																												
0R6	B	B	B	B	B	B	B																												
0R7	B	B	B	B	B	B	B																												
0R8	B	B	B	B	B	B	B																												
0R9	B	B	B	B	B	B	B																												
1R0	B	B	B	B	B	B	B																												
1R1	B	B	B	B	B	B	B																												
1R2	B	B	B	B	B	B	B																												
1R3	B	B	B	B	B	B	B																												
1R5	B	B	B	B	B	B	B																												
1R6	B	B	B	B	B	B	B																												
1R8	B	B	B	B	B	B	B																												
2R0	B	B	B	B	B	B	B																												
2R2	B	B	B	B	B	B	B																												
2R4	B	B	B	B	B	B	B																												
2R7	B	B	B	B	B	B	B																												
3R0	B	B	B	B	B	B	B																												
3R3	B	B	B	B	B	B	B																												
3R6	B	B	B	B	B	B	B																												
3R9	B	B	B	B	B	B	B																												
4R0	B	B	B	B	B	B	B																												
4R3	B	B	B	B	B	B	B																												
4R7	B	B	B	B	B	B	B																												
5R0	B	B	B	B	B	B	B																												
5R1	B	B	B	B	B	B	B																												
5R6	B	B	B	B	B	B	B																												
6R0	B	B	B	B	B	B	B																												
6R2	B	B	B	B	B	B	B																												
6R8	B	B	B	B	B	B	B																												
7R0	B	B	B	B	B	B	B																												
7R5	B	B	B	B	B	B	B																												
8R0	B	B	B	B	B	B	B																												
8R2	B	B	B	B	B	B	B																												
9R0	B	B	B	B	B	B	B																												
9R1	B	B	B	B	B	B	B																												
100	B	B	B	B	B	B	B																												
120	B	B	B	B	B	B	B																												
150	B	B	B	B	B	B	B																												
180	B	B	B	B	B	B	B																												
200	B	B	B	B	B	B	B																												
220	B	B	B	B	B	B	B																												
270	B	B	B	B	B	B	B																												
300	B	B	B	B	B	B	B																												
330	B	B	B	B	B	B	B																												
390	B	B	B	B	B	B	B																												
470	B	B	B	B	B	B	B																												
560	B	B	B	B	B	B	B																												
680	B	B	B	B	B	B	B																												
820	B	B	B	B	B	B	B																												
101	B	B	B	B	B	B	B	B	B																										
121	B	B	B	B	B	B	B	B	B																										
151	B	B	B	B	B	B	B	B	B																										
181	B	B	B	B	B	B	B	B	B																										
201	B	B	B	B	B	B	B	B	B																										
221	B	B	B	B	B	B	B	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D
271	B	B	B	B	B	B	B	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D

0805																																											
	COG系列							X7R系列							X6S系列					X5R系列					X7S系列						X7T系列					M3L系列	
Cp/V_{DC}	630	500	250	100	50	25	16	250	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	100	50	25	16	10	6.3	25	16	10	6.3	4	50	500
331	B	B	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D							B/D	B/D	B/D	B/D	B/D		
391		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D							B/D	B/D	B/D	B/D	B/D		
471		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D							B/D	B/D	B/D	B/D	B/D	B	D
561		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D							B/D	B/D	B/D	B/D	B/D	B	D
681		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D							B/D	B/D	B/D	B/D	B/D	B	D
821		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D							B/D	B/D	B/D	B/D	B/D	B	D
102		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D							B/D	B/D	B/D	B/D	B/D	B	D
122																																				B	
152			B	B	B	B	B	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D	B	
182				B	B	B	B	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D	B	
222				B	B	B	B	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D	B	
272					B	B	B	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D	B	
332					D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D	B	
362																																				B	
392																																				B	
472					D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D	B	
562					D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D	B	
682					D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D	B	
822																																				B	
103					D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D	B	
153								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
183								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
223								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
273								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
333								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
393								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
473								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
563								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
683								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
104								F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
154									F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
184									F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D							D	D	D	D	D		
224									F	D/F	D	D	D	D	D/F	D	D	D	D	D/F	D	D	D	D	F	D/F	D	D	D	D	D/F	D	D	D	D		
274										D/F	D	D	D	D	D/F	D	D	D	D	D/F	D	D	D	D		D/F	D	D	D	D	D/F	D	D	D	D		
334										D/F	D	D	D	D	D/F	D	D	D	D	D/F	D	D	D	D		D/F	D	D	D	D	D/F	D	D	D	D		
474										D/F	D/F	D/F	D	D	D/F	D/F	D/F	D	D	D/F	D/F	D/F	D	D		D/F	D/F	D/F	D	D	D/F	D/F	D/F	D	D		
684										D	D/F	D/F	D	D	D	D/F	D/F	D	D	D	D/F	D/F	D	D		D	D/F	D/F	D	D	D	D/F	D/F	D	D		
105										F	D/F	D/F	D	D	F	D/F	D/F	D	D	F	D/F	D/F	D	D		F	D/F	D/F	D	D	F	D/F	D/F	D	D		
225											F	F	F	F		F	F	F	F	F	F	F	F	F			F	F	F	F	F	F	F	F	F		
475											F	F	F	F		F	F	F	F	F	F	F	F	F			F	F	F	F	F	F	F	F	F		
106													F	F			F	F	F		F	F	F	F					F	F		F	F	F		
226																		F	F				F	F										F	F		

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.

1206尺寸

	1206																																													
	COG系列									X7R系列											X6S系列					X5R系列					X7S系列							X7T系列						M3L系列		
Cp/V DC	2000	1000	630	500	250	100	50	25	16	2000	1000	630	500	250	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	250	100	50	25	16	10	6.3	50	25	16	10	6.3	4	50	500	630
0R5	D	D	D	D	D	D	D	D	D																																					
1R0	D	D	D	D	D	D	D	D	D																																					
1R1	D	D	D	D	D	D	D	D	D																																					
1R2	D	D	D	D	D	D	D	D	D																																					
1R3	D	D	D	D	D	D	D	D	D																																					
1R5	D	D	D	D	D	D	D	D	D																																					
1R6	D	D	D	D	D	D	D	D	D																																					
1R8	D	D	D	D	D	D	D	D	D																																					
2R0	D	D	D	D	D	D	D	D	D																																					
2R2	D	D	D	D	D	D	D	D	D																																					
2R4	D	D	D	D	D	D	D	D	D																																					
2R7	D	D	D	D	D	D	D	D	D																																					
3R0	D	D	D	D	D	D	D	D	D																																					
3R3	D	D	D	D	D	D	D	D	D																																					
3R6	D	D	D	D	D	D	D	D	D																																					
3R9	D	D	D	D	D	D	D	D	D																																					
4R0	D	D	D	D	D	D	D	D	D																																					
4R3	D	D	D	D	D	D	D	D	D																																					
4R7	D	D	D	D	D	D	D	D	D																																					
5R0	D	D	D	D	D	D	D	D	D																																					
5R1	D	D	D	D	D	D	D	D	D																																					
5R6	D	D	D	D	D	D	D	D	D																																					
6R0	D	D	D	D	D	D	D	D	D																																					
6R2	D	D	D	D	D	D	D	D	D																																					
6R8	D	D	D	D	D	D	D	D	D																																					
7R0	D	D	D	D	D	D	D	D	D																																					
7R5	D	D	D	D	D	D	D	D	D																																					
8R0	D	D	D	D	D	D	D	D	D																																					
8R2	D	D	D	D	D	D	D	D	D																																					
9R0	D	D	D	D	D	D	D	D	D																																					
9R1	D	D	D	D	D	D	D	D	D																																					
100	D	D	D	D	D	D	D	D	D																																					
120	D	D	D	D	D	D	D	D	D																																					
150	D	D	D	D	D	D	D	D	D																																					
180	D	D	D	D	D	D	D	D	D																																					
200	D	D	D	D	D	D	D	D	D																																					
220	D/E	D	D	D	D	D	D	D	D																																					
270	D/E	D	D	D	D	D	D	D	D																																					
300	D/E	D	D	D	D	D	D	D	D																																					
330	D/E	D	D	D	D	D	D	D	D																																					
390	D/E	D	D	D	D	D	D	D	D																																					
470	D/E	D	D	D	D	D	D	D	D																																					
560	D/E	D	D	D	D	D	D	D	D																																					
680	D/E	D	D	D	D	D	D	D	D																																					
820	D/E	D	D	D	D	D	D	D	D																																					
101	D/E	D/E	D	D	D	D	D	D	D	F	F	F	F	F																																
121		D/E	D	D	D	D	D	D	D	F	F	F	F	F																																
151		D/E	D	D	D	D	D	D	D	F	F	F	F	F																																
181		D/E	D	D	D	D	D	D	D	F	F	F	F	F																																
201		D/E	D	D	D	D	D	D	D	F	F	F	F	F																																
101		D/E	D	D	D	D	D	D	D	F	F	F	F	F																																
121		D/E	D	D	D	D	D	D	D	F	F	F	F	F																																
151		D/E	D	D	D	D	D	D	D	F	F	F	F	F																																
181		D/E	D	D	D	D	D	D	D	F	F	F	F	F																																
221		D/E	D	D	D	D	D	D	D	F	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
271		D/E	D	D	D	D	D	D	D	F	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
331		D/E	D	D	D	D	D	D	D	F	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
391			D	D	D	D	D	D	D	F	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
471			D	D	D	D	D	D	D	F	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D		D	D
561			D	D	D	D	D	D	D	F	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D		D	D
681			D	D	D	D	D	D	D	F	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D		D	D
821			D	D	D	D	D	D	D	F	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D		D	D
102			D	D	D	D	D	D	D	F	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	D	D
122																																												D	D	D

1206

	COG系列									X7R系列											X6S系列					X5R系列					X7S系列							X7T系列						M3L系列		
Cp/V_{DC}	2000	1000	630	500	250	100	50	25	16	2000	1000	630	500	250	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	250	100	50	25	16	10	6.3	50	25	16	10	6.3	4	50	500	630
152			D	D	D	D	D	D	D	H	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	D	D
182			D	D	D	D	D	D	D	H	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	D	D
222			D	D	D	D	D	D	D	H	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	D	D
272				D	D	D	D	D	D		F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	D	D
332				D	D	D	D	D	D		F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	D	D
362																																												D	E	E
382																																												D	E	E
472						D	D	D	D		F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	E	E
562						D	D	D	D		F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	F	F
682						D	D	D	D		F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	F	F
822																																												D	H	H
103						D	D	D	D		F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D	D	H	H
153											H	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
183												F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
223												F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
273												H	H	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
333												H	H	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
393												H	H	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
473												H	H	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
563													H	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
683													H	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
104													H	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
154														H	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
184														H	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D								D	D	D	D	D	D			
224														H	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	H	D	D	D	D	D	D	D	D	D	D	D	D			
274															D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		D	D	D	D	D	D	D	D	D	D	D	D			
334															D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		D	D	D	D	D	D	D	D	D	D	D	D			
474															F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F	F	F	F			
684															F/H	F/H	F	F	F	F	F/H	F	F	F	F	F/H	F	F	F	F		F/H	F/H	F	F	F	F	F/H	F/H	F	F	F	F			
105															H	F/H	F	F	F	F	F/H	F	F	F	F	F/H	F	F	F	F		H	F/H	F	F	F	F	F/H	F/H	F	F	F	F			
205																F/H	E	E	E	E	E	E	E	E	E	F/H	E	E	E	E			F/H	E	E	E	E	F/H	E	E	E	E	E			
225																H	F	F	F	F	H	F	F	F	F	H	F	F	F	F			H	F	F	F	F	H	F	F	F	F	F			
475																	H	H	H	H	H	H	H	H	H	H	H	H	H	H				H	H	H	H	H	H	H	H	H	H			
106																	H	H	H	H		H	H	H	H	H	H	H	H	H				H	H	H	H		H	H	H	H	H			
226																								H	H		H	H	H	H											H	H	H			
476																									H				H	H													H			

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.


1210尺寸

	1210																																							
	C0G系列						X7R系列											X6S系列					X5R系列					X7S系列						X7T系列						
Cp/V_{DC}	2000	1000	500	250	100	50	2000	1000	630	500	250	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	100	50	25	16	10	6.3	100	50	25	16	10	6.3	4
100	D																																							
120	D																																							
150	D																																							
180	D																																							
200	D																																							
220	D																																							
270	D																																							
300	D																																							
330	D																																							
390	D																																							
470	D																																							
560	D																																							
680	D																																							
820	D																																							
101	D	D	D	D	D	D																																		
121	F	D	D	D	D	D																																		
151	F	D	D	D	D	D																																		
181	F	D	D	D	D	D																																		
201	F	D	D	D	D	D																																		
221	F	D	D	D	D	D	F	F	F	F	F	F																												
271		D	D	D	D	D	F	F	F	F	F	F																												
331		D	D	D	D	D	F	F	F	F	F	F																												
391		D	D	D	D	D	F	F	F	F	F	F																												
471		D	D	D	D	D	F	F	F	F	F	F																												
561		F	D	D	D	D	F	F	F	F	F	F																												
681		F	D	D	D	D	F	F	F	F	F	F																												
821		F	D	D	D	D	F	F	F	F	F	F																												
102		F	D	D	D	D	F	F	F	F	F	F																												
152			D	D	D	D	F	F	F	F	F	F																												
182			D	D	D	D	F	F	F	F	F	F																												
222			D	D	D	D	F	F	F	F	F	F																												
272			F	D	D	D	H	F	F	F	F	F																												
332				D	D	D	H	F	F	F	F	F																												
472				D	D	D	H	F	F	F	F	F																												
562								F	F	F	F	F																												
682								F	F	F	F	F																												
103								F	F	F	F	F																												
153								F	F	F	F	F																												
223								H	H	H	F	F																												
333									H	H	F	F																												
473									G	G	F	F																												
563											F	F																												
683											F	F																												
104											F	F																												
154											H	H																												
224											G	H																												
334												G																												
374												G																												
474												G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G			G	G	G	G	G
684												H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H			H	H	H	H	H
105												H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H			H	H	H	H	H
225													H	H	H	H	H	H	H	H	H	H	H	H	H	H	H		H	H	H	H	H	M	M	H	H	H	H	H
475														H/G	H	H	H	M	H/G	H	H	H		H/G	H	H	H			H/G	H	H	H	M	M	M	H/G	H	H	H
106														M	G	M	M	M	M	G	M	M		M	G	M	M			M	G	M	M		M	M	M	G	M	M
226															M	M	M		M	M	M	M			M	M	M				M	M	M			M	M	M	M	M
476																M	M				M	M				M	M					M	M						M	M
107																						M					M													

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.

5. 产品尺寸 Dimensions

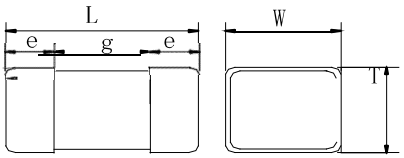

规格：0201、0402、0603、0805、1206、1210。

Chip Size：0201,0402,0603,0805,1206 and 1210

规格 Type	L (mm)	W (mm)	e (mm)	g min (mm)	T（mm）/代码 Code	
0201	0.60±0.03	0.30±0.03	0.1~0.2	0.2	0.30±0. 03	Z
0201*2	0.60-0.03/+0.1	0.30-0.03/+0.1	0.1~0.2	0.2	0.30-0.03/+0.1	Z
0402	1.00±0.10	0.50±0.10	0.15~0.3	0.4	0.50±0.10	A
0402*2	1.00-0.05/+0.2	0.50-0.05/+0.2	0.15~0.3	0.4	0.50-0.05/+0.2	A
0603	1.60±0.10	0.80±0.10	0.2~0.6	0.5	0.80±0.10	C
0603*1	1.60±0.20*1	0.80±0.20*1	0.2~0.6	0.5	0.80±0.20*1	C
0603*3	1.60-0/+0.3	0.80-0/+0.3	0.2~0.6	0.5	0.80-0/+0.3	C
0805	2.00±0.10	1.25±0.10	0.2~0.7	0.7	0.60±0.10	B
					0.85±0.10	D
					1.00±0.10	E
					1.25±0.20	F
0805*1	2.00±0.20*1	1.25±0.20*1	0.2~0.7	0.7	0.60±0.10	B
					0.85±0.20	D
					1.25±0.20	F
1206	3.20±0.20	1.60±0.20	0.3~0.8	1.6	0.85±0.10	D
					1.00±0.10	E
					1.25±0.20	F
					1.60±0.20	H
1206*1	3.20±0.30*1	1.60±0.30*1	0.3~0.8	1.6	0.85±0.10	D
					1.00±0.10	E
					1.25±0.20	F
					1.60±0.30*1	H
1210	3.20±0.30	2.5±0.20	0.3~0.8	1.6	0.85±0.10	D
					1.25±0.20	F
					1.60±0.20	H
					2.00±0.20	G
					2.50±0.30	M
1210*1	3.20±0.40*1	2.5±0.30*1	0.3~0.8	1.6	0.85±0.10	D
					1.25±0.20	F
					1.60±0.30	H
					2.00±0.20	G
					2.50±0.30	M

*1 标识该规格型号标识为 1uF 及以上规格产品尺寸。

*2 标识该规格型号标识为 100nF 及以上规格产品尺寸。

*3 标识该规格型号标识为 10uF 及以上规格产品尺寸。

6. 技术要求和测试条件 Specification and Test Condition

6.1 外观 Appearance

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R/X7T/ X6S/X7S/M3L	1/10L＜L≤1/8L,1/10W＜W≤1/8W, 1/10T＜T≤1/8T（任意一项不符合，均判定不合格） (None is acceptable，All judged unqualified)	目视检查 Visual inspection.

6.2 尺寸 Dimensions

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R/X7T/ X6S/X7S/M3L	在要求的范围内 Within the specified dimensions	用千分尺 Using calipers on micrometer

6.3 容量 Capacitance

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG	在要求的容值容差范围内 Within the specified tolerance A:±0. 05pF;B:±0.1pF;C:±0.25pF; D:±0.5pF;J: ±5%	1.0±0.2Vrms, 1MHz±10% (C>1000 pF, 1.0±0.2Vrms, 1KHz±10%，)
X7R/X5R/X7T /X6S/X7S/M3L	在要求的容值容差范围内 Within the specified tolerance J: ±5%；K: ±10%； M: ±20%	1.0±0.2Vrms, 1KHz±10% （Cp＞10uF,0.5±0. 1Vrms,120±24Hz）
备注：测试温度：25℃±3℃，测试湿度：＜70%RH. 针对二类介质规格需去老化处理，条件：电容器在 150℃热处理 1 小时，放置 48h 后进行测量。		

6.4 损耗 Dissipation Factor

<table>
<tr><th>类型 Dielectrics</th><th>技术要求 Specification</th><th>测试条件 Testing Condition</th></tr>
<tr><td>COG</td><td>Cp<30pF, Q≥400+20Cp;
Cp≥30pF, Q≥1000</td><td>1.0±0.2Vrms,1MHz±10% ,25℃
(Cp>1000pF,1.0±0.2Vrms,1KHz±10%)</td></tr>
<tr><td>M3L</td><td>Q≥400</td><td>1.0±0.2Vrms,1MHz±10% ,25℃（Cp＜1nF);
1.0±0.2Vrms,1KHz±10% ,25℃（ Cp≥1nF）</td></tr>
<tr><td>X7R/X5R/X7T
/X6S/X7S</td><td>
<table>
<tr><th>规格</th><th>U_R</th><th>容量范围</th><th>DF</th></tr>
<tr><td rowspan="2">0201</td><td>≤25V</td><td>C≤0.47μF</td><td>≤10%</td></tr>
<tr><td>>25V</td><td>C≤0.01μF</td><td>≤7.0%</td></tr>
<tr><td rowspan="4">0402</td><td rowspan="2">≤25V</td><td>C≤0.47μF</td><td>≤7.0%</td></tr>
<tr><td>C≥0.47μF</td><td>≤10%</td></tr>
<tr><td rowspan="2">>25V</td><td>C≤0.1μF</td><td>≤7.0%</td></tr>
<tr><td>C>0.1μF</td><td>≤10%</td></tr>
<tr><td rowspan="5">0603</td><td rowspan="2">≤25V</td><td>C≤0.47μF</td><td>≤7.0%</td></tr>
<tr><td>C≥0.47μF</td><td>≤10.0%</td></tr>
<tr><td rowspan="3">>25V</td><td>C≤0.1μF</td><td>≤5.0%</td></tr>
<tr><td>0.1μF<C≤0.22μF</td><td>≤7.0%</td></tr>
<tr><td>C>0.22μF</td><td>≤10%</td></tr>
<tr><td rowspan="4">0805</td><td rowspan="2">≤25V</td><td>C≤1μF</td><td>≤7.0%</td></tr>
<tr><td>C>1μF</td><td>≤10.0%</td></tr>
<tr><td rowspan="2">>25V</td><td>C≤0.47μF</td><td>≤7.0%</td></tr>
<tr><td>C>0.47μF</td><td>≤10.0%</td></tr>
<tr><td rowspan="4">1206</td><td rowspan="2">≤25V</td><td>C<2.2μF</td><td>≤7.0%</td></tr>
<tr><td>2.2μF≤C<47μF</td><td>≤10.0%</td></tr>
<tr><td rowspan="2">>25V</td><td>C<1μF</td><td>≤7.0%</td></tr>
<tr><td>1μF≤C<47μF</td><td>≤10.0%</td></tr>
<tr><td rowspan="2">1210</td><td rowspan="2">/</td><td>C<2.2μF</td><td>≤7.0%</td></tr>
<tr><td>2.2μF≤C<47μF</td><td>≤10.0%</td></tr>
</table>
</td><td>1.0±0.2Vrms, 1KHz±10%,
(Cp＞10uF,0.5±0.1Vrms,
120±24Hz)</td></tr>
<tr><td colspan="3">备注：测试温度：25℃±3℃，测试湿度：＜70%RH. 针对二类介质规格需去老化处理，条件：电容器在 150℃热处理 1 小时，放置 48h 后进行测量。</td></tr>
</table>

6.5 绝缘电阻 Insulation Resistance

<table>
<tr><th>类型 Dielectrics</th><th>技术要求 Specification</th><th>测试条件 Testing Condition</th></tr>
<tr><td>COG/X7R/X5R
/X7T/X6S/X7S</td><td>U_R≤50V，大于 10 GΩ 或 100Ω·F /CR(大于其中较小的数值)
U_R≤50V ， More than 10 GΩ or 100Ω·F /CR, whichever is smaller.</td><td>U_R≤50V $U_{测}=U_R$；
充电时间:60±5 秒
温度:25℃
Charge Time:60±5 sec
Temperture:25℃</td></tr>
<tr><td>COG/X7R/X7T
/X6S/X7S</td><td>U_R＞50V，大于 4GΩ 或 100Ω·F/CR (大于其中较小的数值)
U_R＞50V，More than 4 GΩ or 100Ω·F/CR , whichever is smaller.</td><td>U_R≤400V $U_{测}=U_R$
U_R＞400V $U_{测}$=400V；
充电时间:60±5 秒
温度:25℃
Charge Time:60±5 sec
Temperture:25℃</td></tr>
<tr><td>M3L</td><td>大于10 GΩ 或 100Ω-F(大于其中较小的数值) More than 10 GΩ or 100Ω·F, whichever is smaller.</td><td>20～30℃,环境湿度小于 70%,测量时间 60±5 秒，测量电压如下：
<table>
<tr><td>额定电压</td><td>≤400V</td><td>＞400V</td></tr>
<tr><td>测量电压</td><td>U_R</td><td>400V</td></tr>
</table>
Test for 60±5sec, at 20～ 30 ℃, humility under 70% , under test voltage：
<table>
<tr><td>U_R</td><td>≤400V</td><td>＞400V</td></tr>
<tr><td>U_T</td><td>U_R</td><td>400V</td></tr>
</table></td></tr>
<tr><td colspan="3">备注：测试温度：25℃±3℃，测试湿度：＜70%RH.</td></tr>
</table>

6.6 耐电压 Dielectric Strength


<table>
<tr><th>类型 Dielectrics</th><th>额定电压范围 Rated voltage range</th><th>耐电压性能测试方法 Measuring Method</th></tr>
<tr><td>COG</td><td>U_R≤50V</td><td>施加额定电压的 300%,5 秒,最大电流不超过 50mA
Force 300%Rated voltage for 5second.
Max..current should not exceed 50 mA.</td></tr>
<tr><td>X7R/X5R/X7T
/X6S/X7S</td><td>U_R≤50V</td><td>施加额定电压的 250%,5 秒,最大电流不超过 50mA
Force 250%Rated voltage for 5second.
Max..current should not exceed 50 mA.</td></tr>
<tr><td rowspan="4">COG/X7R/X7T/X7S</td><td>100V≤U_R＜500V</td><td>施加额定电压的 200%,5 秒,最大电流不超过 50mA
Force 200%Rated voltage for 5second.
Max..current should not exceed 50 mA.</td></tr>
<tr><td>500V≤U_R＜1000V</td><td>施加额定电压的 150%,5 秒,最大电流不超过 50mA
Force 150% Rated voltage for 5second.
Max..current should not exceed 50 mA.</td></tr>
<tr><td>1000V≤U_R＜2000V</td><td>施加额定电压的 150%,5 秒,最大电流不超过 50mA
Force 150%Rated voltage for 5second.
Max..current should not exceed 50 mA.</td></tr>
<tr><td>U_R≥2000V</td><td>施加额定电压的 120%,5 秒,最大电流不超过 30mA
Force 120%Rated voltage for 5second.
Max..current should not exceed 30 mA.</td></tr>
</table>

M3L	无损坏或异常 No defects or abnormalities.	当在电容器的两端施加试验电压 5 秒钟，充放电电流不超过 50 mA 额定电压 测试电压 $U_R \leqslant 50$ 2.5U_R $100 \leqslant U_R < 500$ 2U_R $500 \leqslant U_R < 1000$ 1.5U_R+100V $1000 \leqslant U_R < 2000$ 1.5U_R $U_R \geqslant 2000$ 1.2U_R Failure shall be observed the testing voltage is applied between the terminations for 5 seconds, provided the charge /discharge current is less than 50mA

6.7 静电容量温度特性 Temperature Coefficient of Capacitance

<table>
<tr><th>类型
Dielectrics</th><th>技术要求
Specification</th><th colspan="5">测试条件
Testing Condition</th></tr>
<tr><td rowspan="6">COG</td><td rowspan="6">容量变化在±30ppm/ ℃以内容量漂移在±0.2% 或±0.05p F 以内
Temperature coefficient within ±30ppm/ ℃；
Cp drift within ±0.2% or ±0.05pF</td><td colspan="5">按系列温度顺序测试电容容量
Measure capacitance under follow table list temperature:
在 140~150℃预处理 1 小时，放置 24h 后进行测量。</td></tr>
<tr><td>步骤
STEP</td><td>COG,
X7R,X7T</td><td>X6S</td><td>X5R</td><td>X7S</td></tr>
<tr><td>1</td><td>25 ±2</td><td>25 ±2</td><td>25 ±2</td><td>25 ±2</td></tr>
<tr><td>2</td><td>-55±3</td><td>-55±3</td><td>-55±3</td><td>-55±3</td></tr>
<tr><td rowspan="3">X7R/X5R</td><td rowspan="3">容量变化在±15% 以内
Capacitance change within ±15%</td><td>3</td><td>25 ±2</td><td>25 ±2</td><td>25 ±2</td><td>25 ±2</td></tr>
<tr><td>4</td><td>125±3</td><td>105±3</td><td>85±3</td><td>125±3</td></tr>
<tr><td>5</td><td>25 ±2</td><td>25 ±2</td><td>25 ±2</td><td>25 ±2</td></tr>
<tr><td>X7T</td><td>容量变化在+22%, -33%以内
Capacitance change within +22%, -33%</td><td colspan="5" rowspan="2">1) COG
容量漂移的计算方法为：用步骤 3 测量的电容容值量除以在第 1、3 和 5 步骤测量得到的误差的最大值和最小值的差。温度系数的计算以第 3 步骤测量电容容量为参考。
2) X7R、X5R、X7T、X6S 和 X7S
与 25℃时的电容容量相比较，电容容量在温度范围内的变化在要求的范围之内。</td></tr>
<tr><td>X6S/X7S</td><td>容量变化在±22%以内
Capacitance change within ±22%</td></tr>
<tr><td>M3L</td><td>容量变化在
-1000±500ppm/℃以内
Temperature coefficient within -1000±500ppm/℃</td><td colspan="5">按系列温度顺序测试电容容量
Measure capacitance under follow table list temperature:
步骤 温度
STEP Temperature（℃）
1 25 ±2
2 -55±3
3 25 ±2
4 125±3
5 25±2</td></tr>
<tr><td colspan="7">备注：0201 及以上、0402 及以上规格、0603及以上规格、0805 及以上规格、1206/1210及以上规格，测试电压：＜0.5V。</td></tr>
</table>

6.8 附着力 Adhesion

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R /X7T/X6S/X7S/ M3L	端电极无松动，也无其它不良现象 No removal of the terminations or other defect shall occur.	施加 6N 的压力，并保持 10±1 秒 The pressurizing force shall be 6N (=600g*f) and the duration of application shall be 10±1sec. 


6.9 可焊性 Solderability of Termination

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R /X7T/X6S/X7S/ M3L	端电极挂锡面积不小于 95%，针孔或粗糙面积小于 5% 95% min. coverage of both terminal electrodes and less than 5% have pin holes or rough spots.	锡炉温度：245±5 ℃ 浸入时间： 2±1 秒 两侧端电极完全浸入焊锡炉 Solder temperature: 245±5 ℃ Dipping time: 2±1 second s. Completely soak both terminal electrodes in solder

6.10 耐焊性 Resistance to leaching

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R /X7T/X6S/X7S/ M3L	端电极挂锡面积不小于 95%，针孔或粗糙面积小于 5%,外观无开裂 95% min. coverage of both terminal electrodes and less than 5% have pin holes or rough spots. No remarkable visual damage.	预热：120℃~150℃/60 秒 锡炉温度：270±5 ℃ 浸入时间： 10±1 秒 两侧端电极完全浸入焊锡炉 Solder temperature: 270±5 ℃ preheated: 120℃~150℃/60sec Dipping time: 10±1 seconds. Completely soak both terminal electrodes in solder

6.11 端电极结合强度 Bending

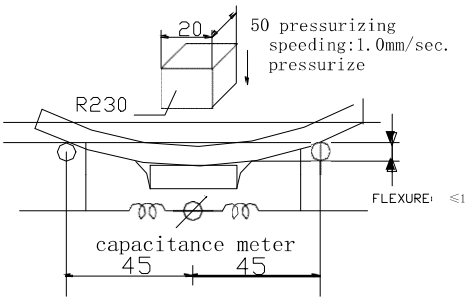类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/ M3L	无可见损伤； 容量变化小于等于± 5% 或± 0. 5pF（取较大值） No remarkable visual damage Cp change within ±5.0% or ±0.5pF, whichever is larger.	将片状电容器安装在测试夹具上，按图所示方向以 1.0mm/s 的速率施加压力，弯曲 1mm。 Solder the capacitor on testing substrate and put it on testing stand. The middle part of substrate shall successively be pressurized by pressuring rod at a rated of about 1.0mm/sec. Until the deflection become means of the 1.0mm. 
X7R/X5R/X7T /X6S/X7S	无可见损伤； 容量变化小于等于±1 0% No remarkable visual damage Cp change ≤ ±10%	

6.12 耐焊接热 Resistance to Soldering Heat

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/ M3L	无明显可见损伤 容量变化在±2.5% 或±0.25pF（取较大值）以内 DF 满足产品初始值的要求 IR 满足产品初始值的要求 No remarkable visual damage Cp change within ±2.5% or ± 0.25pF, whichever is larger. DF meets initial standard value. IR meets initial standard value.	焊接温度: 270±5 ℃ 预热: 120~150℃ 60 秒 浸入时间: 10±1 秒 在室温下放置 24±2 (COG、 M3L) 或 48±4(X7R 、X5R、X7S、X7T、X6S) 小时以后测量试验后在标准条件下恢复 *高介电常数电容器的初始值测量 在 140~150℃进行 1 小时的热处理后在室温下放置 48±4 小时 测量初始值 Soldering temperature: 270±5 ℃ Preheating: 120~150℃ 60sec. Dipping time: 10±1 seconds. Measurement to be made after being kept at room Temperature for 24±2 (COG、 M3L) (X 7R ,X5R, X7S、X7T、X6S) hours. Recov ery for the following period under the standard condition after test. *Initial measurement for high dielectric constant type Perform a heat treatment at 140~150℃ for 1hr and let sit for 48±4hrs at room temperature. Perform the initial measurement.
X7R/X5R/X7T /X6S/X7S	无明显可见损伤 容量变化在±7.5%以内 DF 满足产品初始值的要求 IR 满足产品初始值的要求 No remarkable visual damage Cp change within ±7.5% DF meets initial standard value. IR meets initial standard value.	

6.13 温度快速循环 Temperature Cycle

<table>
<tr><th>类型 Dielectrics</th><th>技术要求 Specification</th><th>测试条件 Testing Condition</th></tr>
<tr><td>COG/ M3L</td><td>无明显可见损伤
容量变化在±2.5%（COG/ M3L）或 ±0.25pF（取较大值）以内

No remarkable visual damage
Cp change within ±2.5%（COG/ M3L） or ±0.25pF, whichever is larger.</td><td>按下列步骤进行 5 次循环：
To perform 5 cycles of the stated environment
<table>
<tr><th>步 骤
Step</th><th>温度
Temperature</th><th>时间
Time</th></tr>
<tr><td>1</td><td>下限类别温度
+0/-3℃</td><td>30min</td></tr>
<tr><td>2</td><td>25℃</td><td>2~3 min</td></tr>
<tr><td>3</td><td>上限类别温度
+3/-0℃</td><td>30 min</td></tr>
<tr><td>4</td><td>25℃</td><td>2~3 min</td></tr>
</table></td></tr>
<tr><td>X7R/X5R/X7T
/X6S/X7S</td><td>无明显可见损伤
容量变化在±7.5% 以内

No remarkable visual damage
Cp change within ±7.5%</td><td>在室温下放置 48±4 X7R, X5R, X7S、X7T、X6S) 小时以后测量
*高介电常数电容器的初始值测量
在 140~150℃进行 1 小时的热处理后
在室温下放置 48±4 小时
测量初始值
Measurement to be made after being kept at room temperature for 24±2hrs (COG) or 48±4hrs (X7R, X5R, X7S 、X7T、X6S) at room temperature, then measure.
*Initial measurement for high dielectric constant type
Perform a heat treatment at 140~150 ℃ for 1hr and let sit for 48±4hrs at room temperature.
Perform the initial measurement.</td></tr>
</table>

6.14 稳态湿热 Moisture Resistance ,steady state

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG	外观无明显可见损伤 容量变化在±5%或 ±0.5pF（取较大值）以内 Cp<10pF, Q≥200+10Cp; 10≤Cp<30pF, Q≥275+2.5Cp Cp≥30pF, Q≥350 IR: 大于 1000MΩ 或 10Ω·F(取较小值) No remarkable visual damage Cp change within ±5% or ±0.5pF, whichever is larger. Cp<10pF, Q≥200+10Cp; 10≤Cp<30pF, Q≥275+2.5Cp Cp≥30pF, Q≥350 R*C≥1000MΩ or 10Ω·F, whichever is smaller	测试温度: 40±2 ℃ 湿度: 90~95% RH 测试时间: 500 ±12hrs 在室温下放置 24±2 (COG) 或 48±4(X7R 、X5R、X7S、X7T、X6S) 小时以后测量 *高介电常数电容器的初始值测量在 140~150℃进行 1 小时的热处理后在室温下放置 48±4 小时测量初始值 Test temperature: 40±2 ℃ Humidity: 90~95% RH Testing time: 500 ±12hrs Measurement to be made after being kept at room temperature for 24±2hrs (COG) or 48±4hrs (X7R, X5R, X7S、X7T、X6S) *Initial measurement for high dielectric constant type Perform a heat treatment at 140~150℃ for 1hr and let sit for 48±4hrs at room temperature. Perform the initial measurement.
X7R/X5R/X7T /X6S/X7S	外观无明显可见损伤 容量变化在±12.5%以内 DF 为初始值的 2 倍以下 IR:大于 1000MΩ 或 10Ω·F(取较小值) Cp change within ±12.5% DF:Not more than 2 times of initial value R*C≥1000MΩ or 10Ω·F, whichever is smaller	
M3L	外观无明显可见损伤容量变化在±5%以内 Q≥350 IR: 大于 1000MΩ No remarkable visual damage Cp change within ±5% Q≥350 IR≥1000MΩ	

6.15 耐湿负荷 Damp heat with load

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG	外观无明显可见损伤 容量变化在±7.5%或±0.75pF（取较大值）以内 Cp<30pF, Q≥100+10/3*Cp Cp≥30pF, Q≥200 IR: 大于 500MΩ 或 5Ω·F(取较小值) No remarkable visual damage Cp change≤±7.5% or ±0.75pF, whichever is larger. Cp<30pF, Q≥100+10/3*Cp Cp≥30pF, Q≥200 R*C≥500MΩ or 5Ω·F, whichever is smaller	测试温度: 40±2 ℃ 湿度: 90~95% RH 电压: 额定电压 测试时间: 500 ±12hrs 在室温下放置 24±2 (COG) 或 48±4(X7R、X5R、X7S、X7T、X6S) 小时以后测量 *在 40±2 ℃温度下，将电容器加额定直流电压 1hrs. 去掉电压，将电容器在室温下放置 48±4hrs 测量初始电容值。
X7R/X5R/X7T /X6S/X7S	外观无明显可见损伤 容量变化在±12.5%以内 DF 为初始值的 2 倍以下IR: 大于 500MΩ 或 5Ω·F(取较小值) No remarkable visual damage Cp change≤±12.5% DF:Not more than 2 times of initial value R*C≥500MΩ or 5Ω·F, whichever is smaller	Test temperature: 40±2 ℃ Humidity: 90~95% RH Voltage: 100% of the rated voltage Testing time: 500 ±12hrs Measurement to be made after being kept at room temperature for 24±2hrs (COG) or 48±4hrs (X 7R, X5R, X7S、X7T、X6S) *Apply the rated DC voltage for 1 hour at 40±2 ℃. Remove and let sit for 48±4hrs at room temperature. Perform the initial measurement.
备注：该项可靠性试验仅适用于常规产品，不适用于中高压产品。		


6.16 耐久性 Life Test

<table>
<tr><th>类型Dielectrics</th><th>技术要求 Specification</th><th>测试条件 Testing Condition</th></tr>
<tr><td>COG</td><td>外观无明显可见损伤
容量变化在±3%或±0.3pF（取较大值）以内
容量在 30pF 以上，Q≥350
容量在 10pF 以上且小于 30 pF，Q≥275+(2.5* Cp)
容量小于 10pF,Q≥200+10*Cp
IR:大于 1000MΩ 或 5Ω·F(取较小值)
No remarkable visual damage
Cp change≤±3% or ±0.3pF, whichever is larger.
Q≥350 (Cp≥30 pF)
Q≥275+(2.5* Cp) (10 pF≤Cp<30 pF)
Q≥200+10*Cp (Cp<10 pF)
R*C≥1000MΩ or 5Ω·F, whichever is smaller</td><td rowspan="2">测试温度：上限类别温度±3 ℃
电压：U_R＜100V 1.5 倍额定电压(*见备注)
测试时间: 1000 小时
在室温下放置 24±2 (COG) 或 48±4(X7R 、X5R、X7S、X7T、X6S) 小时以后测量
*高介电常数电容器的初始值测量在上限类别温度±3 ℃，将电容器加 1.5 倍额定直流电压 1 小时去掉电压，将电容器在室温下放置 48±4hrs测量初始电容值

Test temperature:
Max. Operating Temp. ±3 ℃ Voltage:U_R＜100V 150% of the rated voltag（*Remarks） Testing time: 1000 hrs
Measurement to be made after being kept at room temperature for 24±2hrs (COG) or 48±4hrs (X7R, X5R,X7S、X7T、X6S)
*Initial measurement for high dielectric constant type Apply 150% of the rated DC voltage for one hour at the maximum operating temperature ±3 ℃. Remove and let sit for 48±4hrs at room temperature. Perform the initial measurement</td></tr>
<tr><td>X7R/X5R/X7T /X6S/X7S</td><td>外观无明显可见损伤
容量变化在±12.5%以内
DF 为初始值的 2 倍以下
IR:大于 1000MΩ 或 5Ω·F(取较小值)
No remarkable visual damage
Cp change≤±12.5%
DF:Not more than 2 times of initial value
R*C≥1000MΩ or 5Ω·F, whichever is smaller</td></tr>
<tr><td>M3L</td><td>外观无明显可见损伤</td><td>测试温度：上限类别温度(-0/+3)℃
试验电压
额定电压 测试电压
U_R≤50 2.0 U_R
100≤ U_R＜500 1.5 U_R
500≤ U_R＜1000 1.2 U_R U_R
≥1000 1.0 U_R
当额定电压大于 1000V 时，应将装有容器的夹具浸于硅油中。
测试时间: 1000 小时
在室温下放置 24±2
Test temperature:
Max. Operating Temp. (-0/+3)℃
Voltage:
Rated Voltage Test Voltage
100≤UR＜500 1.5UR
500≤UR＜1000 1.2UR
1000≤UR 1.0UR
When the rated voltage is higher than 1000V,the testing container must dip in the silicon oil.
Measurement to be made after being kept at room temperature for 24±2hrs</td></tr>
<tr><td colspan="3">备注：0201、0402/104 及以上规格、0603/105 及以上规格、0805/225 及以上规格、1206/475 及以上规格、1210/225 及以上规格，按照 1 倍额定电压测试。</td></tr>
</table>

7. 产品包装 Packing

7.1 纸带尺寸 Dimensions of Packing Paper

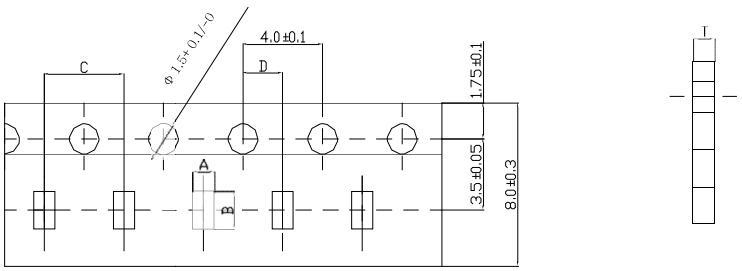


Type	A	B	C	D	T
0201	0.36±0.03	0.67±0.03	2.0±0.10	2.0±0.05	0.42max
0402	0.65±0.10	1.15±0.10	2.0±0.05	2.0±0.05	0.8max
0603	1.05±0.10	1.85±0.10	4.0±0.10	2.0±0.10	1.1max
0805	1.55±0.15	2.3±0.15	4.0±0.10	2.0±0.10	1.1max
1206	1.95±0.15	3.5±0.15	4.0±0.10	2.0±0.10	1.1max


(单位 unit:毫米 mm)

7.2 塑料带尺寸 Dimensions of Embossed Packing

8mm宽，4mm间距编带

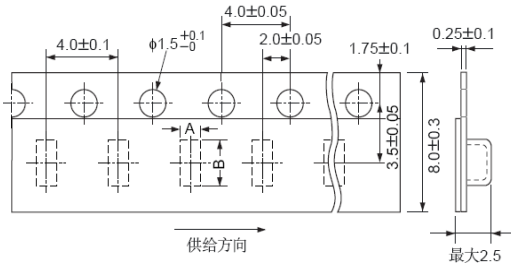


12mm宽，8mm/4mm间距编带

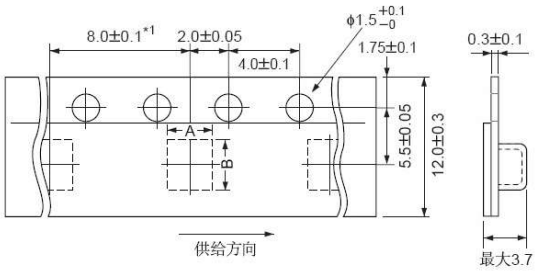


A：1.45±0.20 B：2.25±0.20 （0805） A：1.95±0.20 B：3.50±0.20 （1206） (单位 unit:毫米 mm)

A：2.90±0.20 B：3.60±0.20 （1210）

7.3 编带盘尺寸 Dimensions of Reel

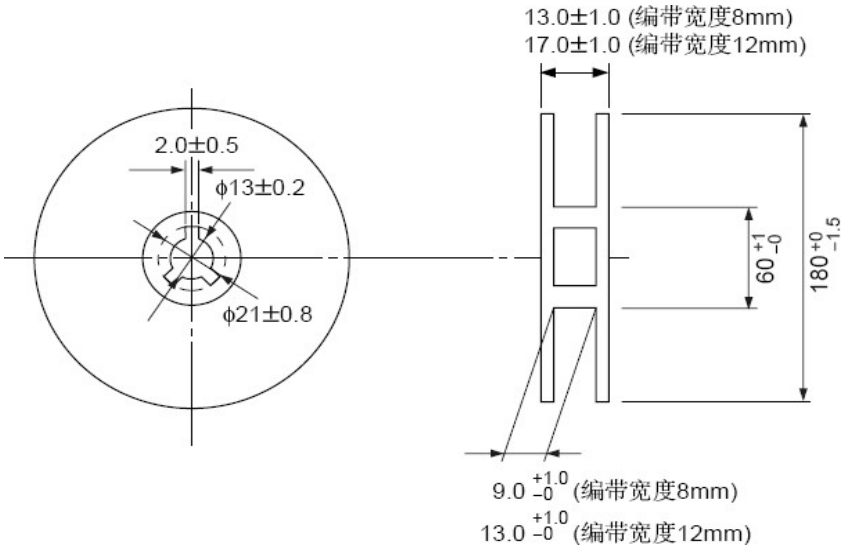

7.4 编带方式 Taping Figure

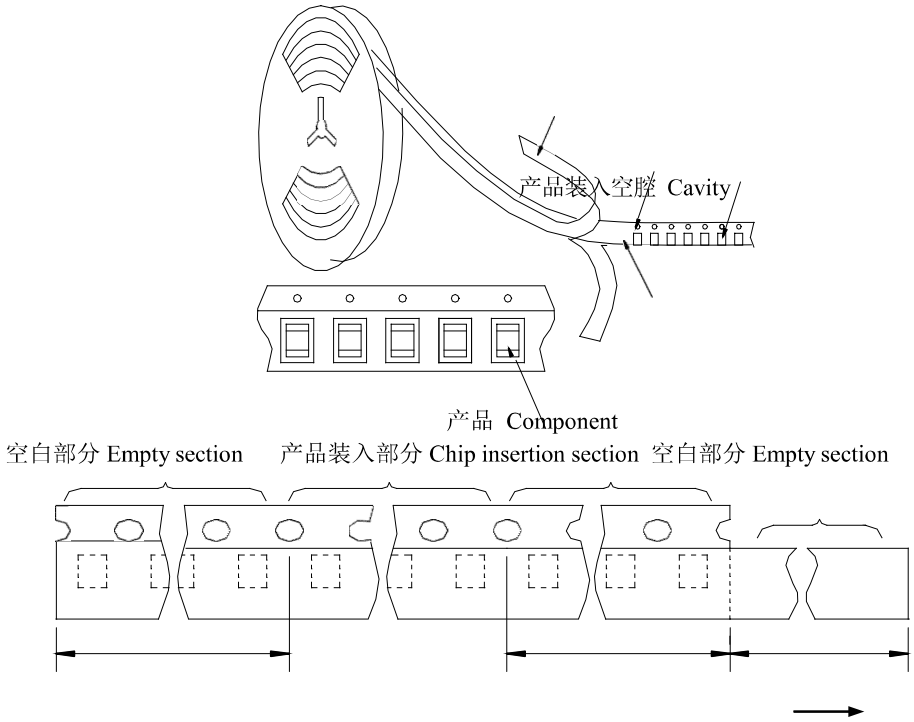

7.5 编带方法 Taping Method

① 包装电容器的编带是顺时针卷绕的，由上往下的方向拉出编带时，传送孔处于编带的右侧。

② 在编带的前端，至少留出 5 个间距的引出带。

③ 在编带时，必须按下图留出引带部分或空白部分。

④ 在盘带的安装中的产品装错的数量每盘必须小于表示数量的 0.1%或 1 个为限，不连续发生错误。

⑤ 上胶带和下胶带不应超出编带的边缘，不能挡住传送孔。

⑥ 传送孔的累计误差为 10 个间距：±0.3 毫米以内。

⑦ 上胶带的剥离力矩应在 0.1 至 0.6 牛顿以内，其方向如下图所示。

①Tapes for capacitors are wound clockwise. The sprocket holes are to the right as the tape is pulled toward the user.

②The top tape and base tape are not attached at the end of the tape for a minimum of 5 pitches.


③Part of the leader and part of the empty tape shall be attached to the end of the tape as follows.

④Missing capacitors number within 0.1% of the number per reel or 1pc, whichever is greater, and are not continuous.

⑤The top tape and bottom tape shall not protrude beyond the edges of the tape and shall not cover sprocket holes.

⑥Cumulative tolerance of sprocket holes, 10 pitches: ±0.3mm.

⑦Peeling off force: 0.1 to 0.6N in the direction shown down.

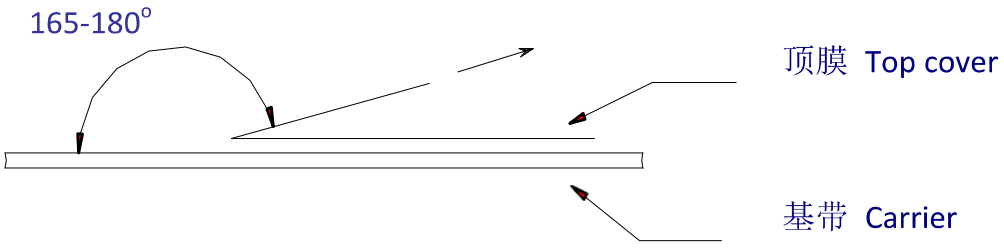

8.MLCC 使用注意事项 Precautions on the use of MLCC

8.1 电路板设计 PCB Design

8.1.1 电路板图案设计 Design of Land-patterns

下面图和表格给出了部分推荐的设计图案，可以防止安装时焊锡量过多。

同时也给出了不正确的图案。

The following diagrams and tables show some examples recommended patterns to prevent excessive solder amounts (larger fillets which above the component end terminations)

Examples of improper pattern designs are also shown.


电路板设计推荐图案尺寸：


Recommended land dimensions for a typical chip capacitor land patterns for PCBs

波峰焊接时推荐设计的尺寸 (单位: mm)：

Recommended land dimensions for wave-soldering (unit: mm)

规格 SIZE		0603	0805	1206
尺寸	L	1.6	2.0	3.2
	W	0.8	1.25	1.6
A		0.8~1.0	1.0~1.4	1.8~2.5
B		0.5~0.8	0.8~1.5	0.8~1.7
C		0.6~0.8	0.9~1.2	1.2~1.6





再流焊接时推荐设计的尺寸 (单位: mm)

Recommended land dimensions for reflow-soldering (unit: mm)







规格 SIZE		0201	0402	0603	0805	1206	1210
尺寸	L	0.6	1.0	1.6	2.00	3.2	3.2
	W	0.3	0.5	0.8	1.25	1.6	2.5
A		0.20~0.25	0.35~0.45	0.6~0.8	0.8~1.2	1.8~2.5	1.8~2.5
B		0.20~0.30	0.40~0.50	0.6~0.8	0.8~1.2	1.0~1.5	1.0~1.5
C		0.25~0.35	0.45~0.55	0.6~0.8	0.9~1.6	1.2~2.0	1.6~3.2

过量的焊锡会影响产品抵抗机械应力的能力，因此在设计图案时应引起注意。

Excess solder can affect the ability of chips to withstand mechanical stresses. Therefore, please take proper precautions when designing land-patterns.

在应用中一些焊接好与坏的情况：



Examples of good and bad solder application

项目 Item	不推荐结构 Not recommended	推荐结构 Recommended
片状元件和带引线的元件的混合焊接 Mixed mounting of SMD and leaded component		
靠近底座的焊接 Component placement close to the chassis		
在片状元件附近带引线元件的焊接 Hand-soldering of leaded components near mounted components		

8.1.2 图案结构 Pattern configurations


下面是电容器安装好与坏的例子。选择贴装位置，应尽可能减小电路板在弯曲时受到的机械应力。

The following are examples of good and bad capacitor layout, SMD capacitors should be located to minimize any possible mechanical stresses from board warp or deflection.

	不推荐结构 Not recommended	推荐结构 Recommended
电路板弯曲 Deflection of the board		

对于电路板分拨的电容器，在分拨时受到的机械应力大小与电容器的安装有关。下面推荐了一些好的设计。

To layout the capacitors for the breakaway PC board, it should be noted that the amount of mechanical stresses given depending on capacitor layout. The example below shows recommendations for better design.

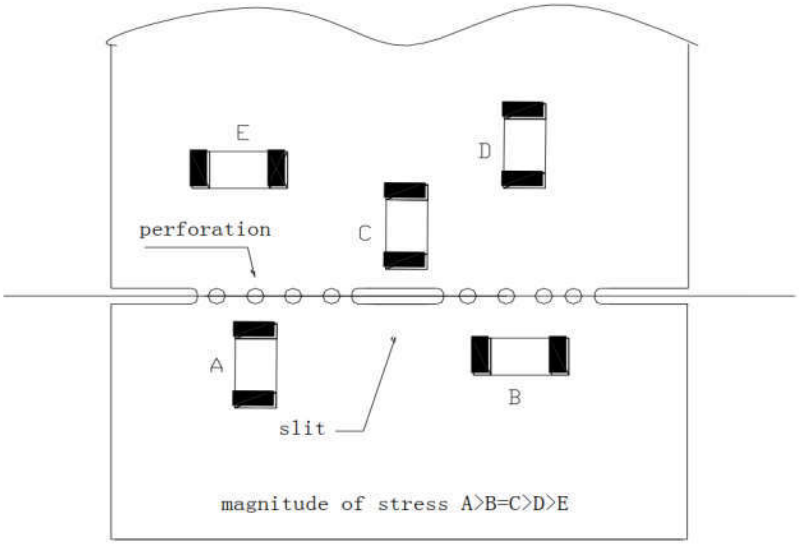

在沿着分拨线分拨电路板时，对产品施加的机械应力与使用的方法关系很大。分折电路板时片状元件受到的疲劳按照如下顺序增大：分折、剪切、V 型槽、穿孔。因此，贴装时应该考虑电路板的分拨过程。

When breaking PC boards along their perforations, the amount lf mechanical stress on the capacitors can vary according to the method used. The following methods are listed in order from least stressful to most stressful: push-back, silt, -grooving, and perforation. Thus, any ideal SMD capacitor layout must also consider the PCB splitting procedure.

8.2 自动贴装注意事项　Considerations for automatic placement





贴装机的调整　Adjustment of mounting machine

①. 产品在电路板贴装时，不应该受到过大的冲击。

②. 必须定期对吸头和定位爪进行检查、维修和更换

①. Excessive impact load should not be imposed on the capacitors when mounting the PC boards.

②. The maintenance and inspection of the mounters should be conducted periodically.

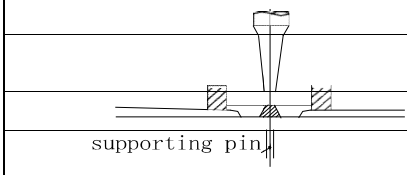	不推荐结构 Not recommended	推荐结构 Recommended
单面贴装 Single-sided mounting		
双面贴装 Double-sided mounting		


8.3 推荐焊接曲线　Recommended soldering profile

8.3.1 说明：①　产品推荐使用回流焊接工艺；②　大尺寸产品适用于回流焊接工艺

Re：①flow Soldering is recommended；②flow soldering is suitable for bigger size MLCCs

8.3.2 锡铅焊接曲线　Recommended Sn&Pb soldering profile


回流焊 Reflow soldering

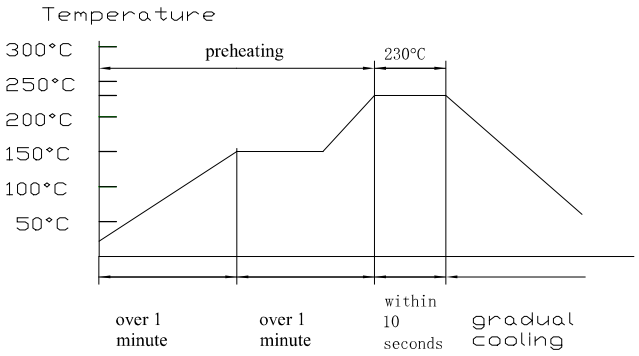

注意 Caution

① . 理想状况的焊锡高度为电容器厚度的 1/3 ~1/2，如下图所示：

①.The ideal condition is to have solder mass (fillet) controlled to 1/2 to 1/3of the thickness of the capacitor, as shown below:

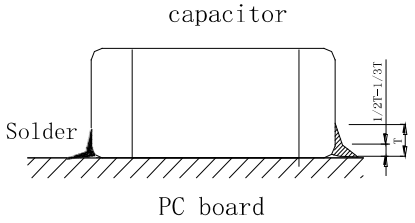


②. 过长的焊接时间会影响端头的可焊性, 焊接时间尽可能保持与推荐时间一致。

②. Because excessive dwell times can detrimentally affect solderability, soldering duration should be kept as close to recommended times as possible.

波峰焊

Wave solder profile

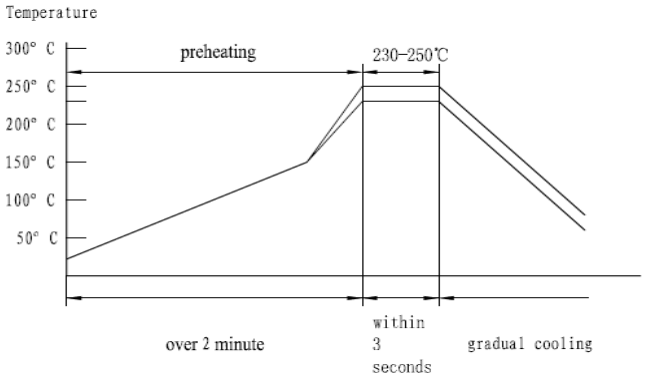

注意 Caution

② .确保电容器充分预热。

②.产品预热和焊接温度差不超过 150℃。


③.焊接后尽可能慢速冷却。

①.Make sure the capacitors are preheated sufficiently.

②.The temperature difference between the capacitor and melted solder should not be greater than 100 to 130℃.

③. Cooling after soldering should be gradual as possible.

手工焊接 Hand soldering

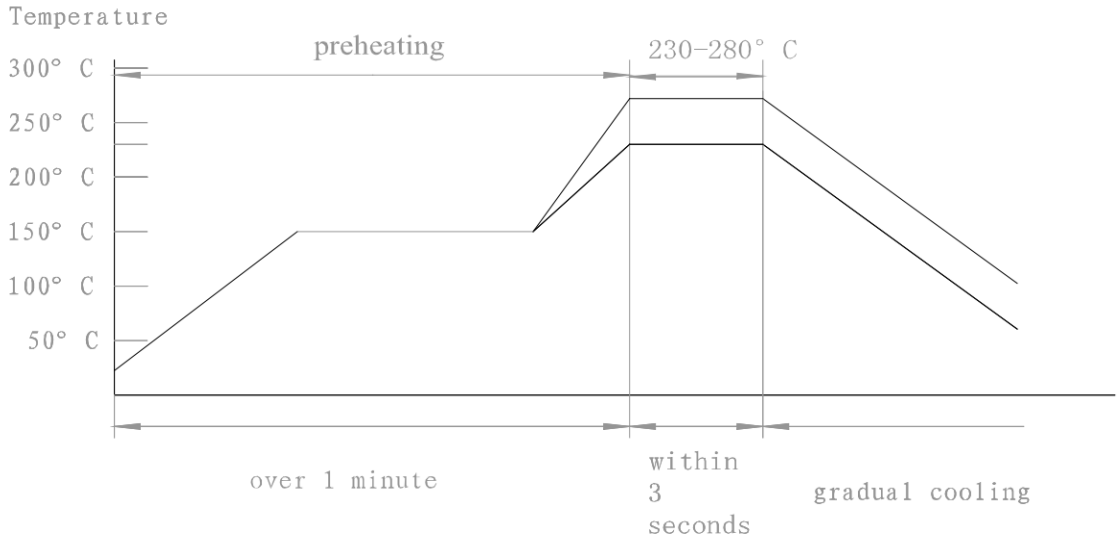

注意 Caution

①.用尖端最大直径 1.0mm 功率 20W 的焊接烙铁。

②.焊接烙铁不要直接接触产品。


①.Use a 20w soldering iron with a maximum tip diameter of 1.0mm.

② .The soldering iron should not directly touch the capacitor.


8.3.3 无铅焊接曲线 Recommended Pb-Free soldering profile

回流焊接

Reflow solder

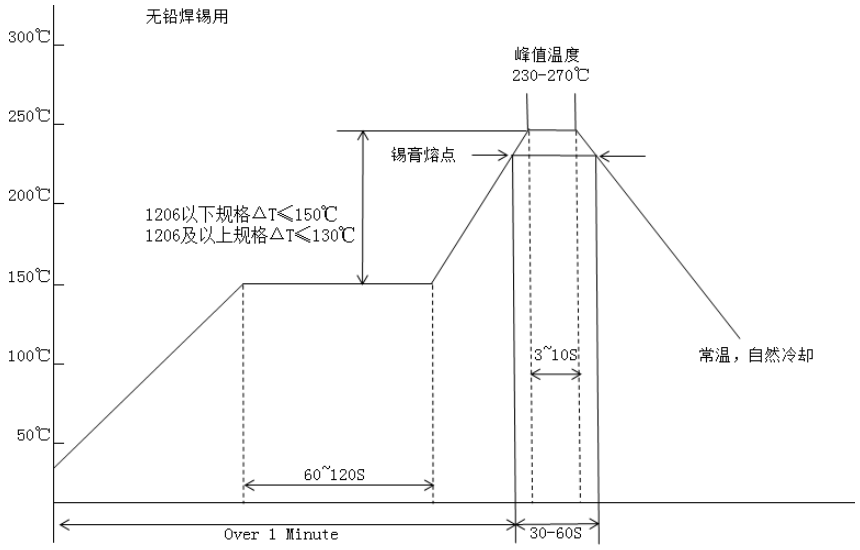

波峰焊接
Wave solder profile

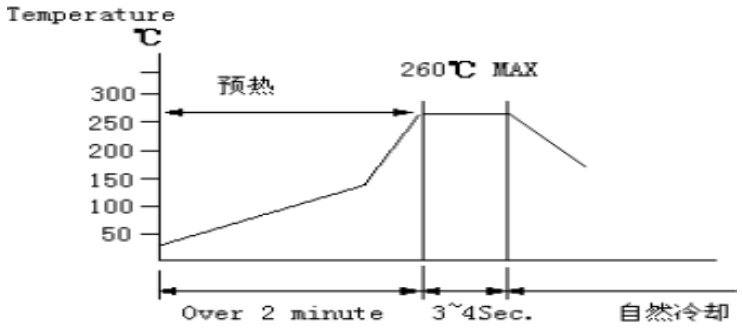

8.4 分拨电路板 Handling

Breakaway PC boards (splitting along perforations)

⑴.在电容器或其它贴装后，必须注意因电路板弯曲或变形带来的应力。

⑵.分拨电路板时必须使用专用的夹具，不可以用手拨断。

⑴.When splitting the PC board after mounting capacitors and other components, care is required so as not to give any stresses of deflection or twisting to the board.

⑵.Board separation should not be done manually, but by using the appropriate devices.

8.5 保存 Storage

⑴.在下列环境中保存产品：温度 5~40℃；湿度 ≤70% RH

⑵.产品自生产之日保存期为一年，产品使用之前请勿拆开编带。

⑶.编带拆开后，产品应在三个月内使用。

⑷.高介电常数电容器 (X7R,X5R,Y5V、X7T、X6S) 的容值随时间会逐渐减小，所以在电路设计时应充分考虑这一现象。容值减小的电容器在 150℃热处理 1 小时后容值会恢复到初始值。

⑴. Keep the storage environment conditions as following: Temperature: 5~40℃； Humidity: ≤70% RH

⑵. Don’t open the tape until the parts are to be used, and store them within one year since the date printed on the reel.

⑶. Use the chips within 3 months after the tape is opened.

⑷. The capacitance value of high dielectric constant capacitors (X7R,X5R,Y5V、X7T、X6S) will gradually decrease with the passage of time, so this should be taken into consideration in the circuit design. If such a capacitance reduction occurs, a heat treatment of 150℃ for 1 hour will return the capacitance to its initial level.

相关特性曲线图 Curve diagram of related features

(例) (example) **MLCC0350V104X7RKC**

